

THIS DRAWING/DESIGN IS STRICTLY CONFIDENTIAL & THE COPYRIGHT THEREIN THE EXCLUSIVE PROPERTY OF MOBILE CLIMATE CONTROL INC. AND MAY NOT BE USED OR COPIED OR EXHIBITED WITHOUT THEIR WRITTEN PERMISSION.


EL. CONNECTION:

- ORANGE - HIGH
- RED - MEDIUM
- YELLOW - LOW
- BLACK - GROUND
- WHITE - TO THERMOSTAT
- BLUE - TO THERMOSTAT

EL. LEADS (EXT. 305±50)
ORANGE-HIGH, RED-MEDIUM
YELLOW-LOW, BLACK-GROUND

5/8-18 FE (OR #6)
7/8-18 FE (OR #10)
REFR. HOSE CONN.

5/8" OD HEATER
HOSE CONN.

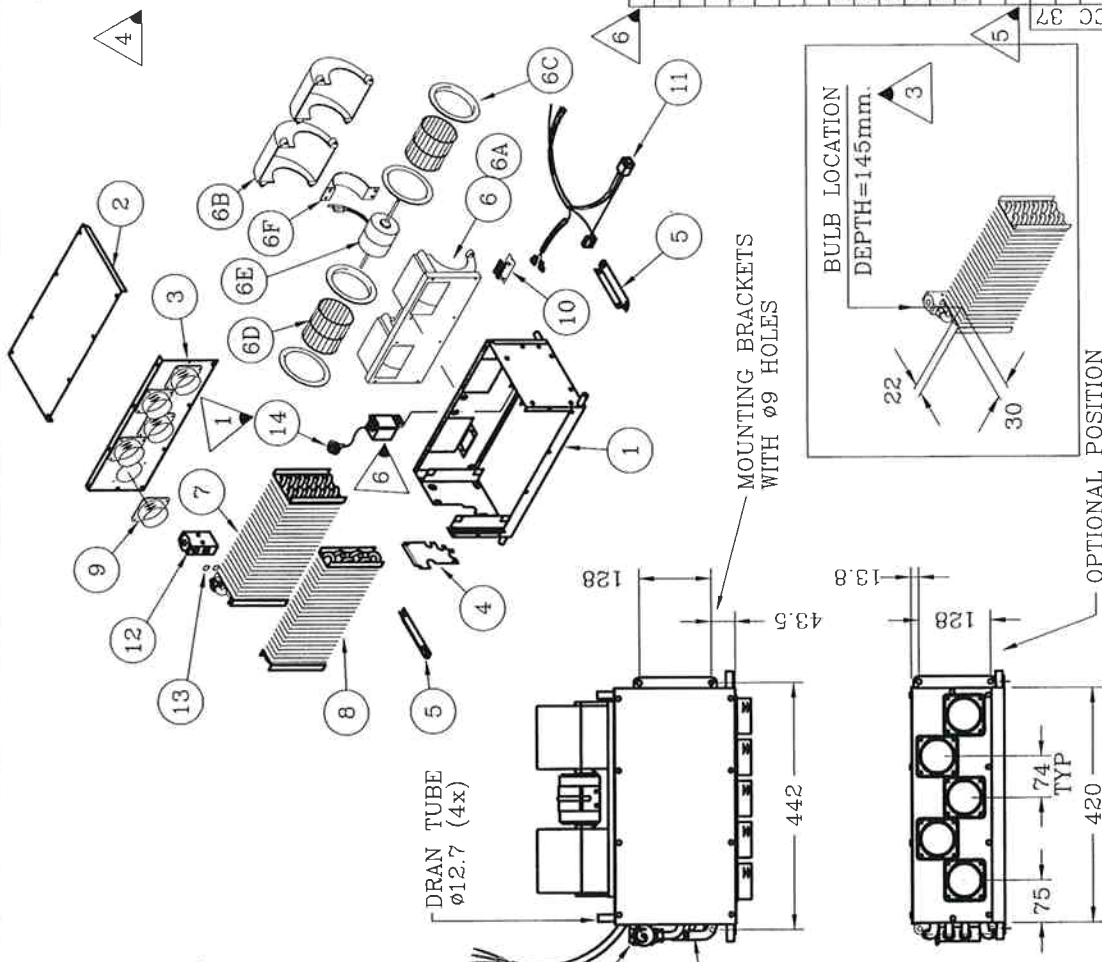

SPECIFICATIONS:

- HEATING - 10500 W (36000 BTU/H)
- COOLING - 8350 W (28500 BTU/H)
- AIRFLOW - 765 m³/h (450 CFM)
- CURRENT - LOW SPEED 4.5 AMPS @27.2V
- MED SPEED 7.5 AMPS @27.2V
- HIGH SPEED 11 AMPS @27.2V
- WEIGHT - 8.6 KG (19 LBS.)

PERMANENT MAGNET MOTOR WITH BALL BEARING.

CASING MADE OF 18GA COLD ROLLED STEEL AND FINISHED IN BLACK SEMI-GLOSS EPOXY POWDER COAT.

SYM	PCS	PART NO.	DESCRIPTION
14	1	25-1163	THERMOSTAT
13	2	27-0602	O-RING #8
12	1	26-0190	BLOCK VALVE
11	1	25-0671	WIRING HARNESS
10	1	25-0552	RESISTOR 24V
9	5	23-0125	HOSE ADAPTER 2.5"
8	1	22-0348	HEATER COIL
7	1	21-0091	EVAPORATOR COIL
6F	1	25-0271	MOTOR MOUNT
6E	1	25-0650	MOTOR 24V
6D	1	25-0200	BLOWER WHEEL
6C	2	25-0060	VENTURI
6B	4	25-0348	HOUSING TOP
6A	2	25-0048	BLOWER HOUSING
6	1	15-1502	BLOWER 24V
5	2	24-0033	MOUNTING BRACKET
4	1	24-0017	COIL COVER
3	1	24-0013	COVER
2	1	24-0028	COVER
1	1	24-0027	CASING

CHECK BY: <i>lw</i>	DATE: <i>5/5/03</i>	DESCRIPTION	SCALE: NTS	BY: DP
		13-2504	DATE: MAR 11, 1997	
		HEATER-AC 24V	DWG: P3-4674	REV: 6

North York - Ontario - Canada

METRIC

SYM	DESCRIPTION	DATE	BY
6	REVISED PER ECN #3687	APR 11/03	BV
5	REVISED PER ECN #3030	NOV 19/01	HB
4	REVISED PER DCR #2928	SEP 17/01	MS
3	REVISED PER DCR #2194	OCT 26/00	DB

THIS PRINT IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTEREST OF MOBILE CLIMATE CONTROL INC.